
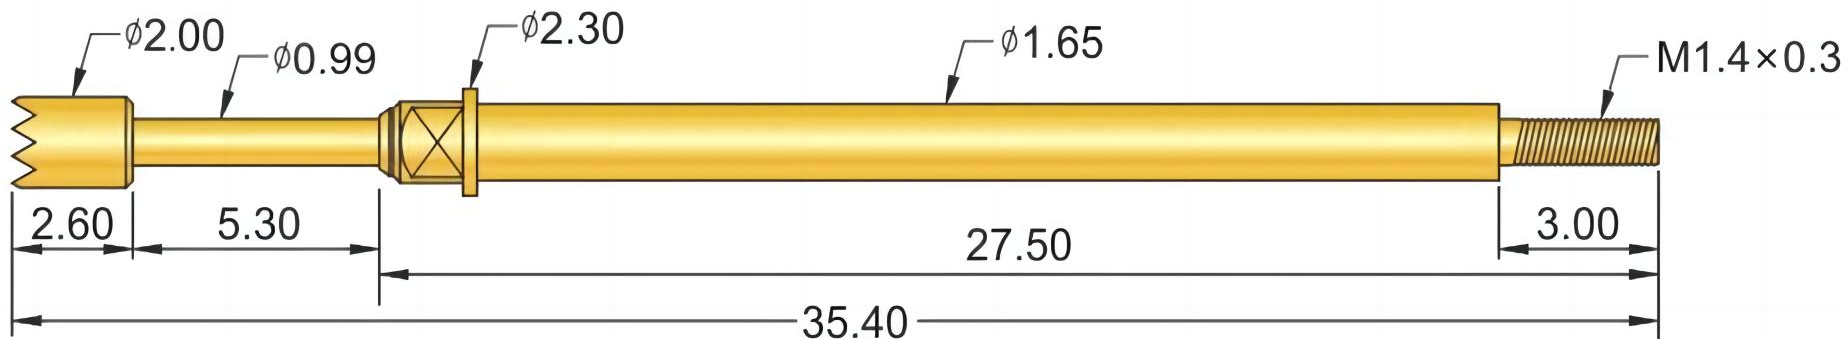









PROBE



技术要求 (Technical Specifications) :		CH165-A	CH165-B
额定电流 (Current Rating)	3A		
额定电阻 (Rated Resistance)	100 milliohm max	CH165-D	CH165-E2
满行程 (Full Stroke)	5.3mm		
额定行程 (Rated Stroke)	3.5mm	CH165-F	CH165-H
额定弹力 (Spring Force)	113±35gf@load 3.5mm		
材质 (Materials) :		CH165-J	CH165-Q1
针杆 (Plunger)	BeCu ,gold-plated		
针管 (Barrel)	Br,gold-plated	CH165-Q2	CH165-T2
弹簧 (Spring)	SWP ,gold-plated		
成品型号 (Product Type) :			
CH165-H-4G(B) 系列 规格 头型 弹力 电镀特性 针杆材质		订购举例:CH165-H-4G(B)	